

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

PATENT COOPERATION TREATY

10/046,933 :88

From the INTERNATIONAL BUREAU

PCT

NOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

To:

MCCLAIN, James, W.
Brown, Martin, Haller & McClain
1660 Union Street
San Diego, CA 92101-2926
ETATS-UNIS D'AMERIQUE

Date of mailing (day/month/year) 14 June 2001 (14.06.01)		IMPORTANT NOTICE	
Applicant's or agent's file reference 8058-PCT04			
International application No. PCT/US00/33401	International filing date (day/month/year) 08 December 2000 (08.12.00)	Priority date (day/month/year) 08 December 1999 (08.12.99)	
Applicant TUNE TO COM INC. et al			

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:
AU,KP,KR,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:
AE,AG,AL,AM,AP,AT,AZ,BA,BB,BG,BR,BY,BZ,CA,CH,CN,CR,CU,CZ,DE,DK,DM,DZ,EA,EE,EP,ES,
FI,GB,GD,GE,GH,GM,HR,HU,ID,IL,IN,IS,JP,KE,KG,KZ,LC,LK,LR,LS,LT,LU,LV,MA,MD,MG,MK,
MN,MW,MX,MZ,NO,NZ,OA,PL,PT,RO,RU,SD,SE,SG,SI,SK,SL,TJ,TM,TR,TT,TZ,UA,UG,UZ,VN,YU,

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on
14 June 2001 (14.06.01) under No. WO 01/42900

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.


Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer J. Zahra Telephone No. (41-22) 338.83.38
--	---



(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 June 2001 (14.06.2001)


PCT

(10) International Publication Number
WO 01/42900 A2

- (51) International Patent Classification⁷: **G06F 3/06**
- (21) International Application Number: **PCT/US00/33401**
- (22) International Filing Date: **8 December 2000 (08.12.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/169,587 **8 December 1999 (08.12.1999)** **US**
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US **Not furnished (CIP)**
Filed on **Not furnished**
- (71) Applicant (for all designated States except US): **TUNE TO COM INC. [US/US];** Suite 680, 303 Twin Dolphin Drive, Redwood City, CA 94065 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **SINCAGLIA, Nicolas, W. [US/US];** 225 West Red Oak Drive, Unit E, Sunnyvale, CA 94065 (US). **LESTER, James, P. [US/US];** 1451 1/2 Shotwell Avenue, San Francisco, CA 94110 (US). **REBAUD, Sylvain, P. [US/US];** 10744 Stevens Canyon Road, #3, Cupertino, CA 95014 (US).
- (74) Agents: **MCCLAIN, James, W. et al.;** Brown, Martin, Haller & McClain, 1660 Union Street, San Diego, CA 92101-2926 (US).
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR.**

[Continued on next page]

(54) Title: **SCHEDULED RETRIEVAL, STORAGE AND ACCESS OF MEDIA DATA**

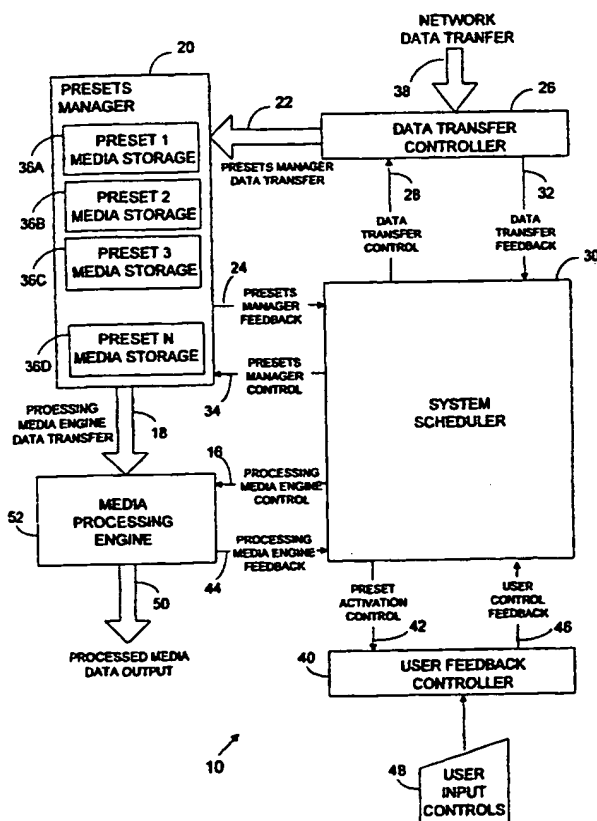

(57) Abstract: A system and method automates a scheduled retrieval, storage, and access of media data. Media data is retrieved from an external source and downloaded to an end user media device storage for subsequent playback at the end user media device. Media data is accessible from the end user media device storage based upon criteria including a selection of the end user, rules regulating the media data, and whether a playback time of the media data is sufficient to retrieve additional media data. The system performs regularly scheduled dynamic controls to determine whether additional media data is required for continuous and uninterrupted access of the media data.

WO 01/42900 A2



HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

- (84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SCHEDULED RETRIEVAL, STORAGE AND ACCESS OF MEDIA DATA

CROSS-REFERENCES TO RELATED APPLICATIONS

5 This application claims priority under 35 U.S.C. 119(e) to provisional U.S. Patent Application No. 60/169,587, filed December 8, 1999, which is incorporated herein by reference in its entirety.

 This application also is related to U.S. Patent Application No. 09/488,487, filed January 20, 2000, which is incorporated herein by reference.

10

BACKGROUND OF THE INVENTION

 This invention relates to media devices, specifically to devices for connecting to a network to efficiently manage the retrieval, storage and access of media data.

15 Prior art devices used to receive media data over a network have been designed for the end user to select stored media data, and either receive the media data streamed individually over a network (unicast), or receive the data already being broadcast to large numbers of users (multicast). Both of the delivery methods of the prior art employs one or more network servers
20 responsible for the scheduling, retrieval and transmission of the media data to the end user. The end user media device generally performs the access and processing of the media data. In this scenario, each media data program must be re-transmitted by a media data provider each time it is scheduled for broadcast, or each time the end user decides to access the data. As a result,
25 these methods of media data delivery are inefficient with respect to network bandwidth utilization, and therefore impart high network costs to the media data provider.

 Methods have been developed to alleviate some of the negative effects associated with these inefficient transmission methods. One such development
30 stores the media data at data hubs that are closer in proximity to the end user, thereby reducing network congestion, associated cost, and increasing efficiency by eliminating the need to re-transmit media data over long distances. However, this methodology does not reduce the need for individualized re-transmission of media data each time an end user make a selection. U.S. Patent No. 5,828,904
35 of Batson et al. describes the scheduled retrieval of data, however this system does not take advantage of storing media data locally for efficient re-accessing.

- 2 -

Further, this system does not provide for copyright owners restrictions and other conditions placed on the media data. U. S. Patent No. 5,826,080 of Dworzecki describes the scheduling of tasks subject to timing and succession constraints. However, this patent does not provide for additional restraints required by media data or copyright owners. In addition, the patent explicitly states that no task is performed at the same time as another task, thus limiting the access rate of the overall system.

U.S. Patent No. 4,949,187 of Cohen describes a video communication system which stores programs locally on a viewing device. This device also limits the access to particular movies and keeps track of royalty payments to movie providers. However, the device of this patent has no means for scheduling the retrieval, storage and access of movie or media data. Further, there is no disclosure of access restrictions placed on individual media data which dictate the scheduled retrieval, storage and access of media data. U.S. Patent No. 5,898,892 to Gulick et al. describes a computer system with a data cache for providing real-time multimedia data to a multimedia engine. However, this system does not consider the efficiencies of media data reuse and access restrictions to media data based on media data and copyright owners restrictions. Therefore, a need remains for an method and system for managing retrieval, storage and access of media data to provide a continuous play list of media data downloaded from an external source, while considering any restrictions placed upon that media data.

SUMMARY OF THE INVENTION

In accordance with an exemplary embodiment of the present invention, a method and system is provided for an end user media device to manage the scheduling of retrieval, storage, and access of media data over a network while maximizing delivery efficiencies and thereby reducing transmission costs.

It is an advantage of the present invention to provide for the efficient delivery of media data to the end user media device utilizing a methodology by which the scheduling of the data retrieval is automated.

It is another advantage to provide media data that is stored locally within the user media device. Thus, if media data is scheduled for multiple sessions, the media data remains resident on the user's media device such that there is no need for network retransmission, thereby maximizing efficiency. As an added benefit, resident data does not exhibit corruption, lost data, dropouts, signal

- 3 -

strength fading, interference or multi-path distortions associated with data transmitted via traditional methods.

It is still another advantage of the present invention to provide the simultaneous scheduling of retrieval, storage and access for faster and more efficient utilization of the user media device.

5 A further advantage of the present invention is to provide a system for scheduling access of media data by complying with laws or requirements associated with the media data as determined by the media content owners or copyright holders. Additionally, access scheduling also may be determined by
10 end user interaction with the system. Finally, access scheduling may be developed to provide the end user with a variety of new data while, at the same time, minimizing the overall turnover rate of the resident media data, thereby reducing network traffic due to repeated transmission. Using this methodology, data is sent over the network only when the media device determines a need for
15 new data.

In an exemplary embodiment of the present invention, an end user media device includes a system scheduler for managing scheduled retrieval, storage and access of media data. The system scheduler sends control signals to a data transfer controller for downloading data media from a data network into media
20 storage locations for eventual output to a user on a sound and/or display controller by means of a media processing engine. The system scheduler of the end user media device contains methods for determination of data format and associated bit rate of the media data to be retrieved in order to maintain scheduled retrieval and access of media data without interruption. This
25 determination is based upon media data already resident in the media storage locations and on aggregate data transfer rate over the data network. Once retrieved from the network, the associated quality of a particular instance of media data, e.g. a media file, is fixed for the period that the media data exists in the media storage. Storage processes of retrieved media data and access to
30 the media data is further regulated based upon requirements associated with the media data and inputs from a user input control.

In an exemplary method of the present invention, the system scheduler processes control signals to a data transfer controller, media storage locations, and a media processing engine in response to a user input control. Stored
35 media data in the media storage locations is verified for playback accessibility based upon the rules associated for each stored media data. The system

- 4 -

scheduler further determines a total playback time of the accessible media data contained in each of the media storage locations including a user selected media storage location. The end user media device commences processing of the user selected media storage location if sufficient media data is available for uninterrupted processing. The system scheduler signals the data transfer controller to download additional media data into any media storage locations that do not contain sufficient media data for uninterrupted processing, with the selected media storage location having priority for receiving the downloaded media data. If a media storage location is full but does not contain sufficient accessible media data for processing, the inaccessible data is purged from the media storage location, and additional media data is downloaded.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be better understood from the following detailed description of an exemplary embodiment of the invention, taken in conjunction with the accompanying drawings in which like reference numerals refer to like parts and in which:

Figure 1 illustrates a system for scheduled retrieval, storage and access of media data of a preferred embodiment;

Figure 2 illustrates a high level flow diagram for a method for scheduled retrieval, storage and access of media data of a preferred embodiment;

Figure 3 is a detailed flow diagram of the determination of a next WritePreset of an embodiment of Figure 2;

Figures 4 is a detailed flow diagram for downloading data of an embodiment of Figure 2;

Figure 5 illustrates an embodiment for determining an optimal media bit rate; and

Figure 6 illustrates a block diagram of a computer system for implementing the system for scheduled retrieval, storage and access of media data of the preferred embodiment;

The following variables are referenced in the equations and/or figures:

NbPresets:	Total number of presets.
Storage[]:	Preset Media Storages (36a-36d)

- 5 -

	ReadPreset:	The preset currently processing media data or media data scheduled for processing.
	WritePreset:	A preset scheduled to receive media data from the network.
5	MediaBitrate:	Enumeration of media bit rates supported by the system.
	Tplaylist[]:	Total playback time in each preset media storage.
	StorageRatio[]:	Cache Ratios for each Media data bit rate available.
10	Ttrigger[]:	Triggers for playback and transfer media bit rate decisions.
	OptimalMediaBitRate:	Optimal Media Bit Rate for next media data transfer.
	NbMediaBitRate:	Maximum number of bit rate trigger calculations supported.
15	Tmin_rotation:	Minimum time associated with program rotation restrictions.

DETAILED DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates a system 10 of the preferred embodiment for scheduled retrieval, storage and access of media data. A data transfer controller 26 monitors the data transfer rate of the media data entering into the system 10 via a network data transfer 38. A data transfer rate is continually calculated by the data transfer controller 26, and is sent to a system scheduler 30 over a data transfer feedback 32 control line. The data transfer controller 26 is controlled by the system scheduler 30 via a data transfer control 28 line.

The system scheduler 30 sends control messages to a presets manager 20 via a presets manager control 34. Presets manager 20 includes any number of preset media storage locations 36a - 36d in which the input media data is to be stored. The data transfer controller 26 routes the input media data to the presets manager 20 utilizing a presets manager data transfer 22 bus. The presets manager 20 notifies the system scheduler 30, via a presets manager feedback 24, of the current status of each preset media storage 36a - 36d.

The system scheduler 30 sends a control message to a user feedback controller 40 via a preset activation control 42 when particular conditions are satisfied or unsatisfied. The user feedback controller 40 allows user selectable controls 48 to become activated or inactivated. The user feedback controller 40 accepts input controls from the end user utilizing user input controls 48. The end

- 6 -

user may select the preset media storage 36a - 36d which is intended for access. Each preset media storage 36a - 36d may comprise media data having related criteria. Typical related criteria includes media data related in theme, style, or time period of public release. In one embodiment of the present invention, each preset media storage 36a - 36d contains media data that is related according to criteria of style such as classical or popular music. The User feedback controller 40 sends feedback to the system scheduler via a user control feedback 46.

The system scheduler 30 sends control messages to a media processing engine 52 to initiate processing of media data from the user selected media storage. Control messages sent to the media processing engine 52 are sent via media processing engine control 16 lines. The presets manager 20 sends media data to the media processing engine 52 via a media processing engine data transfer 18 when the system scheduler 30 has enabled the user selected user preset media storage. Information about the media data in the process of being rendered is sent back to the system scheduler 30 via a media processing engine feedback 44. The processing media engine 52 processes the media data and outputs the data through a processed media data output 50.

Figure 6 illustrates a block diagram of a computer system 600 for enabling an embodiment of the invention. The computer system 600 comprises microprocessor 606, memory 608, clock 614, bus controller 612, sound controller 624, sound transducer 626, display controller 628, display device 630, user input control 602, input interface 604, media storage 616, storage interface 620 and network connection 632. The clock generator 614 is utilized by the microprocessor 606 for determining timing for realtime playback of media data stored in the media storage 616. Microprocessor 606 is also coupled to memory 608, the input interface 604 and bus controller 612 by a first bus 610. Memory 608 is utilized to store an application of the present invention that implements the scheduled retrieval, storage and access of the media data. The input interface 604 is coupled to user input control 602. The user input control 602 accepts the user selections for preset media storage 36a - 36d. The bus controller 612 is coupled to the clock generator 614, the sound controller 624, display controller 628 and storage interface 620 by a second bus 618. The sound controller 624 is coupled to sound transducer 626 which may, for example, be a conventional speaker for playing sound media data. Display controller 628 is coupled to

- 7 -

display device 630 for playing graphical media data. Media storage 616 is utilized for storing media data, and is coupled to storage interface 620.

Microprocessor 606 may be a complex instruction set computing (CISC) microprocessor, reduced instruction set computing (RISC) microprocessor, very long instruction word (VLIW), application specific integrated circuit (ASIC) component, logic circuitry or other processor device. Microprocessor 606 executes instructions or code stored in memory 608, processes input data from User Input Control 602, and performs operations on audio data, video data or other data stored in media storage 616. Memory 608 may be a dynamic random access memory (DRAM), static random access memory (SRAM), cache memory, magnetic hard disk, optical CD-ROM, DVD-ROM or other optical disk or other memory device. Memory 608 may store instructions or code that are part of application programs, operating system programs or other computer programs to execution by microprocessor 606.

A storage interface 620 is coupled to a media storage 616 that may be a magnetic hard disk, non volatile read/write memory storage or other read/write optical disks. Media storage 616 is accessed through a computer network 632 or other suitable connection. Computer network 632 connectivity includes but is not limited to landline, wireless or satellite transmissions or any suitable connection to a network which will enable transfer of data from a network.

Referring to Figure 1, at initialization of the system 10, the presets manager 20 sends messages to a system scheduler 30 that include the current status of each preset media storage 36a - 36d. The status of each preset media storage 36a - 36d includes the allocated cache storage size, a most recent time stamp access information for all media data stored in the media storage, the number of times the media data has been accessed in the past, and the end user's last access of a preset media storage 36a - 36d. Based upon the status of the preset media storage, the system scheduler 30 selects the preset media storage 36a - 36d for receiving media data retrieved from the network data transfer 38. The system scheduler 30 sends a control message 28 to the data transfer controller 26 to begin retrieving media data from the network 38. The control message 28 also indicates which preset media storage 36a - 36d is selected to receive the media data. The data transfer controller 26 begins retrieving data from the network 38 and calculates the average data transfer rate of the data. The average data transfer rate is calculated using a moving average over a specified period of time. The average data transfer rate is given by:

- 8 -

$$\text{average_data_transfer_rate} = (\text{bytes_downloaded})/\Delta t \quad \text{equation 1}$$

$$\text{where } \Delta t = t_{\text{current_time}} - t_{\text{start_time_of_interval}} \quad \text{equation 2}$$

5 The data transfer controller 26 sends the calculated average data transfer rate from the network back to the system scheduler 30 utilizing the data transfer feedback line 32. The system scheduler 30 signals the presets manager 20, utilizing the presets manager control line 34, that media data is being transferred from the data transfer controller 26. The presets manager 20 accepts the media
10 data transfer from the data transfer controller 26, and enables write access to one of the preset media storage devices 36a - 36d.

The presets manager 20 continually updates the status of the preset media storage 36a - 36d and messages the status information to the system scheduler 30. The system scheduler 30 saves the preset media storage status
15 information, the calculation of the data transfer rate, and scheduling criteria for further processing. Scheduling criteria is often dictated by laws or requirements placed on the individual media data by the media content owners or copyright holders. Some of the possible restrictions placed upon the media data may include when or how often the data can be accessed, limits set on the number
20 of times the data is allowed to be accessed or a combination of both. A storage ratio value, StorageRatio[i], is calculated based on the average data transfer rate and a media data bit rate as shown in equation 3.

$$\text{StorageRatio}[i] = \frac{(\text{average_data_transfer_rate})}{(\text{MediaBitrate}[i])} \quad \text{Equation 3}$$

where the MediaBitrate[i] is a bit rate supported by the system. The system scheduler 30 calculates a different cache ratio for each supported media data bit rate.

30 The system scheduler 30 categorizes the stored media files into three categories including "Access to Media Data Granted", "Access to Media Data Denied" and "Discarded Media Data" based upon the status of each media data instance contained within each preset media storage 36a - 36d. Media data that has never been accessed will be placed in the "Access to Media Data Granted"
35 category. Media Data that has recently been accessed and does not comply with the scheduling restrictions placed on the media data by the media content

- 9 -

owners or copyright holders, will be categorized in the "Access to Media Data Denied". Media Data placed in the "Access to Media Data Denied" category will be placed in the "Access to Media Data Granted" category only when the scheduling restrictions allow. Media data is categorized in the "Discarded Media Data" category as a result of User Input Controls 48, or as dictated by scheduling restrictions. Media data categorized in the "Access to Media Data Denied" category may also be moved to the "Discarded Media Data" category by the System Scheduler 30 if data storage space is required to store new media data in one of the Preset Media Storages 36a - 36d.

The System Scheduler 30 selects the optimal data in the "Access to Media Data Denied" category to be moved to the "Discarded Media Data" category based upon the scheduling restrictions and maximum media data reuse. The media data in the "Discarded Media Data" category are eventually deleted from the system 10. The total playback duration of media data in a Preset Media storage 36a - 36d is calculated by the System Scheduler 30 and is represented by "Tplaylist" for each Preset Media Storage 36a-36d. Only media data in the "Access to Media Data Granted" category contributes to this calculation.

Based on the data transfer rate calculated by the Data Transfer Controller 26, the System Scheduler 30 continually updates a trigger "Ttrigger[i]" for each media data bitrate "MediaBitrate[i]" received from the data transfer controller 26 over the data transfer feedback line 32 utilizing the StorageRatio[i] of equation 3 and equation 4 as follows:

$$T_{trigger}[i] = T_{min_rotation}(1 - StorageRatio[i]) \quad \text{Equation 4}$$

where Ttrigger[i] is the total playback time needed to be able to download a new media at the Media_Bitrate[i] without interrupting the current processing. The System Scheduler 30 determines the total playback time "Tplaylist" available for each preset media storage, and may schedule retrieval of new media data from the network if

$$T_{playlist} > T_{trigger}[i] \quad \text{Equation 5}$$

The optimal media data bit rate "OptimalMediaBitRate" for the current download is equal to the MediaBitrate[i]. Figure 5 illustrates a flowchart for an embodiment

- 10 -

of the present invention for setting the optimal media data bit rate. The system scheduler 30 initializes a variable "i" based upon the number of MediaBitrates supported by the system, arranged from lowest to highest 502. If the total playback time in a particular preset media storage Tplaylist is less than Ttrigger[i] 504, then the variable "i" is decremented 506 and the comparison is performed again until either "i" is 0, block 508, or Tplaylist is greater than Ttrigger[i] 504. If Tplaylist is greater than Ttrigger, then the optimal media data bit rate for this preset is set to the media bitrate of "i", block 510, as calculated by the system scheduler 30. The system scheduler 30 may schedule a retrieval of new media data from the network 38 of optimal media bitrate. If i=0, then optimal media bitrate is equal to MediaBitrate[0] 512 even if Tplaylist is less than Ttrigger [0]. Furthermore, the System Scheduler 30 determines when access and rendering of media data should start to insure an uninterrupted playback of a user selected preset media storage 36a - 36d, or if processing is predicted to be interrupted utilizing the equation:

$$T_{\text{playlist}} > T_{\text{trigger}}[0]$$

Equation 6

The System Scheduler 30 sends a message to the User Feedback Controller 40 at initialization time for each Preset Media Storage 36a-36d that is activated. The User Feedback Controller 40 sends a feedback message to the System Scheduler 30 when an end user wants to access data from a Preset Media Storage 36a-36d. The System Scheduler 30 sends a message to the Media Processing Engine 52 to begin accessing the stored data if an uninterrupted playback requirement, as described in equation 5, is met for the user selected Preset Media Storage 36a - 36d. The System Scheduler 30 sends a message to the Presets Manager 20 to enable access and playback of the the user specified Preset Media Storage 36a - 36d. The Presets Manager 20 enables read access of the media data and the media data is sent to the Media Processing Engine 52 for processing. The System Scheduler 30 continually updates its calculations based on the status information from the Presets Manager 20, the Media Processing Engine 52, the Data Transfer Controller 26 and the User Feedback Controller 40.

Figure 2 is a flow chart of the system logic of an embodiment of the present invention as shown in Figure 1 to determine the scheduling of the retrieval, storage and the access of media data by the system scheduler 30. In

- 11 -

a first step 202, the system scheduler 30 processes inputs including the data transfer feedback 32, the presets manager feedback 24, the processing media engine feedback 44, and the user control feedback 46. Based upon the inputs, the system scheduler 30 updates the dynamic controls of the system 10 including updating of the average data transfer rate of Equations 1 and 2, the CacheRatio of Equation 3, and the Trigger of Equation 4. In step 204, the system scheduler 30 sends control signals to the presets manager 20 and media processing engine 52 to start playback of the user selected preset media storage 36a - 36d if the media data is accessible based upon the accessibility requirements described above.

Continuing with Figure 2, in step 206 the system scheduler 30 determines which, if any, preset media storage 36a - 36d requires retrieval of additional data from the network 38. Figure 3 illustrates a flowchart of an embodiment of block 206 of Figure 2. In step 302, the system scheduler determines whether Tplaylist is greater than Ttrigger[0], as defined by Equation 6, for the "ReadPreset" which is a selected preset media storage 36a - 36d. If the condition of Equation 6 is not met, then the ReadPreset requires data, and the preset media storage 36a - 36d scheduled for receipt of data, i.e., WritePreset is set to ReadPreset in step 304. The system scheduler 30 determines whether the system 10 is currently downloading data 306. If data is being downloaded to ReadPreset, then the download continues. If data is being downloaded to another preset media storages 36a - 36d, then the current download is suspended 308 due to the higher priority of filling ReadPreset, the selected preset media storage 36a - 36d. If ReadPreset has sufficient media data for uninterrupted playback as determined in step 302, then the system scheduler 30 determines whether any of the remaining preset media storages 36a - 36d require additional data by incrementing a variable 310 to step through each of the preset media storages 36a - 36d other than the selected ReadPreset preset media storage 36a - 36d as shown in the loop including steps 312, 314 and 316. If a preset media storage 36a - 36d requires more media data 318, then WritePreset is set to that preset media storage 320.

Referring again to Figure 2, once WritePreset is determined 206, the system scheduler 30 initiates downloading data, if necessary 208. If all preset media storage 36a - 36d have sufficient data, then no downloading of data is required, and the system scheduler 30 repeats the process of scheduling of the retrieval, storage and the access of media data as shown in Figure 2. If a preset

- 12 -

media storage 36a - 36d location requires data, the system scheduler 30 initiates the transfer of media data utilizing the data transfer controller 26.

Figure 4 illustrates a detailed flow diagram for an embodiment of the step of downloading data as shown in block 208 of Figure 2. Referring to Figure 4, the system scheduler 30 determines whether WritePreset is set 402 such that one of the preset media storage 36a - 36d locations requires the retrieval of data. If retrieval is not required, the status of the current selected preset media storage 36a- 36d, ReadPreset, is determined. If ReadPreset is full 404, the downloading is not necessary. If ReadPreset is not full 404, the WritePreset is set to ReadPreset 408 so that media data will be downloaded into ReadPreset. If WritePreset is set 402, then the system scheduler 30 determines whether the preset media storage 36a - 36d corresponding to WritePreset is full 406. If the WritePreset memory is full, but data is categorized as unaccessible, then the unaccessible media data is removed from the WritePreset 410. If media downloading has not started 412, the system scheduler 30 calculates an optimal bitrate for WritePreset 414, and downloading starts or resumes for WritePreset 416.

The reader will recognize that the method described, in which media data is scheduled, for retrieval, storage and access, maximizes the efficiency of a media device with access to a network. These methods efficiently determine the media data bit rates required for retrieval to enable the activation of read access to a Preset Media Storage based on the contents of the Preset Media Storage and the aggregate data transfer rate. In addition, the methods described maximize the reuse of the media data while stored in the Preset Media Storage. Data retrieved may remain resident and be accessed multiple times without repetitive transmissions over a network and still satisfy the access restrictions placed on the data by the media content owners or copyright holders. Once a Preset Media Storage is activated for read access, the end user is able to continually access that Preset Media Storage without interruption.

The described methods can be utilized with any connection to a network. Landline, wireless or satellite transmissions are suitable connections to enable transfer of data from the network to the media device. The term media data includes but is not limited to audio, video, text, speech, MIDI, SMTPE, graphic and animations as potential types of media data that can be scheduled for retrieval, storage and access by an end user. The described methods for media data scheduled retrieval, storage and access may be realized in hardware,

- 13 -

software or firmware implementations. Potential media devices included but not limited to the use of the described methods are computers, set top media devices, hand held devices, portable media devices, mobile media devices, wireless devices, satellite signal receivers and transmitting devices, and short
5 wave and common band radio devices.

Although a preferred embodiment of the invention of a method and apparatus for scheduled retrieval, storage and access of media data has been described above by way of example only, it will be understood by those skilled in the field that modifications may be made to the disclosed embodiment without
10 departing from the scope of the invention, which is defined by the appended claims.

WE CLAIM:

CLAIMS

1. A method of managing a plurality of media data in a data processing system
2 compromising:
4 determining a data transfer rate of said plurality of media data from an
6 external memory storage;
8 storing at least one media data of said plurality of media data in an
10 internal memory storage;
12 determining an access status of at least one media data;
14 determining total continuous rendering time of said at least one media
16 data;
18 providing an input means for an operator to select access of said at least
20 one media data; and
22 processing said at least one media data from said internal memory
24 storage.
2. The method as in claim 1, wherein said external memory storage is an optical
2 disk.
3. The method as in claim 1, wherein said external memory storage is accessed
2 through a computer network.
4. The method as in claim 1, where in said access status comprises at least one
2 access condition predefined by a copyright holder of said media data.
5. The method as in claim 1, where in said access status comprises at least one
2 access condition predefined by a rightful owner of said media data.
6. The method as in claim 4, where in said at least one access condition
2 comprises one of:
4 a specified time elapse between a previous and a current processing of
6 the at least one media data;
8 a maximum allowable times for processing said media data; and
10 a maximum allowable times for processing said media data within a
12 specified time interval of said media data.

- 15 -

- 2 7. The method as in claim 5, where in said at least one access condition
comprises:
a specified time elapse between a previous and a current processing of
4 the at least one media data;
a maximum allowable times for processing said media data; and
6 a maximum allowable times for processing said media data within a
specified time interval of said media data.
- 2 8. The method as in claim 1, wherein said step of determining a total
continuous rendering time comprises:
determining a size of said media data;
4 determining a bitrate of said media data;
determining a playback time of said media data based upon said size and
6 said bitrate.
- 2 9. The method as in claim 1, wherein said input means comprises:
a graphical user interface having a graphical display and a selectable
console device.
- 2 10. The method as in claim 1, wherein the at least one media data comprises
one of :
a single media content data file; and
4 a plurality of media data having related criteria.
- 2 11. The method as in claim 10, where said related criteria comprises at least
one of:
a plurality of media data related in theme;
4 a plurality of media data related in style; and
a plurality of media data related in time period of public release.
- 2 12. The method as in claim 1, wherein said at least one media data comprises
video data, and wherein said step of processing said at least one media data
comprises sending at least a portion of said at least one media data to a display
4 device, each of said at least a portion of said at least one media data
representing a display frame.

- 16 -

13. The method as in claim 1, wherein said at least one media data comprises
2 audio data, and wherein said step of processing said at least one media data
4 comprises providing at least a portion of said at least one media data to a sound
transducer.

14. The method as in claim 1, wherein said at least one media data represents
2 musical notes, and wherein said step of processing comprises providing at least
a portion of said at least one media data to a sound transducer to produce sound.

15. The method as in claim 1, wherein said at least one media data comprises
2 text, and wherein said step of processing comprises providing at least a portion
of said at least one media data to a display device.

16. The method as in claim 1, wherein said at least one media data comprises
2 SMPTE time codes.

17. The method as in claim 1, wherein said at least one media data comprises
2 animated graphical data.

18. The method as in claim 1, wherein managing the plurality of media data
2 further comprises retrieving additional media data from said external memory
storage.

19. The method as in claim 18, wherein said step of retrieving said additional
2 media data resumes after an interruption starting with a most recently stored
data packet of said additional media data from said external memory storage.

20. The method as in claim 19, wherein said continuous rendering time
2 exceeds a first predetermined value, and said data transfer rate exceeds a
second predetermined value, further comprising the step of:
4 determining an increase in optimal data quality available for retrieving said
additional media data from said external memory storage.

21. The method as in claim 20, wherein said optimal data quality provides a
2 higher bitrate data, a larger total data size, a greater computational processing
requirement, and a greater computational resources for processing.

- 17 -

2 22. The method as in claim 1, wherein managing the plurality of media data
further comprises scheduling a storage of additional media data.

2 23. The method as in claim 22, wherein said media data is removed from said
internal memory when said access status is an access denied status, and
4 wherein said total continuous rendering time exceeds a first predetermined
value, and said data transfer rate exceeds a second predetermined value.

2 24. The method as in claim 22, wherein said at least one media data is removed
from said internal memory storage randomly based upon a predetermined ratio
4 of previously processed and never before processed said at least one media
data.

2 25. The method as in claim 22, wherein said scheduling a storage of additional
media data resumes after an interruption starting with a most recently stored
data packet of said additional media data from said external memory storage.

2 26. The method as in claim 22, wherein said total continuous rendering time
exceeds a first predetermined value, and said data transfer rate exceeds a
second predetermined value, further comprising the step of:
4 determining an increase in optimal data quality available for retrieving said
additional media data from said external memory storage.

2 27. The method as in claim 26, wherein said optimal data quality provides a
higher bitrate data, a larger total data size, a greater computational processing
requirement, and a greater computational resources for processing.

2 28. The A method as in claim 1, wherein managing the plurality of media data
further comprises scheduling an access of said at least one media data.

2 29. The method as in claim 28, wherein said access of said media data resumes
after an interruption starting with a most recently stored data packet of said
additional media data from said external memory storage.

- 18 -

2 30. The method as in claim 28, wherein said input means is utilized to select access of said at least one media data if said at least one media data and said access status of said media data affirm said processing.

2 31. An apparatus for scheduling retrieval, storage and access of media data comprising:

4 a storage media for storing said media data;
4 a storage control device for controlling said storage media, said storage control device coupled to a media processing engine for transferring said media
6 data for processing;
8 a storage managing device for managing said storage media;
8 a data transfer control device for transferring said media data into said storage media, said data transfer control device coupled to an external memory
10 source for retrieving media data;
12 a media data processing device for outputting said media data stored in said storage media;
14 an input user control device for selecting said storage media; and
14 a scheduling device coupled to said data transfer control device for determining the data transfer rate from an external memory, said scheduling
16 device coupled to said input user control device for receiving an operator input selection, said scheduling device coupled to said storage control device for
18 controlling the receipt of media data, said scheduling device for determining access status.

2 32. The apparatus of claim 31, wherein said storage control device is operable to determine said media data access status predetermined by copyright holder or media data owner.

33. The apparatus of claim 31, wherein said media data comprises video data.

34. The apparatus of claim 31, wherein said media data comprises audio data.

35. The apparatus of claim 31, wherein said media data comprises text data.

36. The apparatus of claim 31, wherein said media data comprises MIDI data.

- 19 -

2 37. The apparatus of claim 31, wherein said media data comprises SMPTE data.

2 38. The apparatus of claim 31, wherein said media data comprises represents musical note data.

2 39. The apparatus of claim 31, wherein said media data comprises animated graphical data.

2 40. The apparatus of claim 31, further comprising a network interface and wherein said storage media data is coupled to said network interface, and wherein said data is retrieved from said storage media through a computer network and said network interface.

2 41. The apparatus of claim 31, wherein said media processing engine is operable to retrieve said media data from said storage device for processing said media data and transmit processed data to a display device.


2 42. An apparatus for scheduling retrieval, storage and access of media data comprising:

4 a storage media for storing said media data;
4 a data transfer control device for transferring said media data into said storage media, said data transfer control device coupled to an external memory source for retrieving said media data;

6 a media data processing device for outputting said media data stored in said storage media;

8 an input user control device for selecting said storage media; and
10 a scheduling device coupled to said data transfer control device for determining the data transfer rate from the external memory, said scheduling device coupled to said input user control device for receiving an operator input selection, said scheduling device coupled to said data transfer control device for controlling the receipt of said media data, said scheduling device for determining access status.

THIS PAGE BLANK (USPTO)

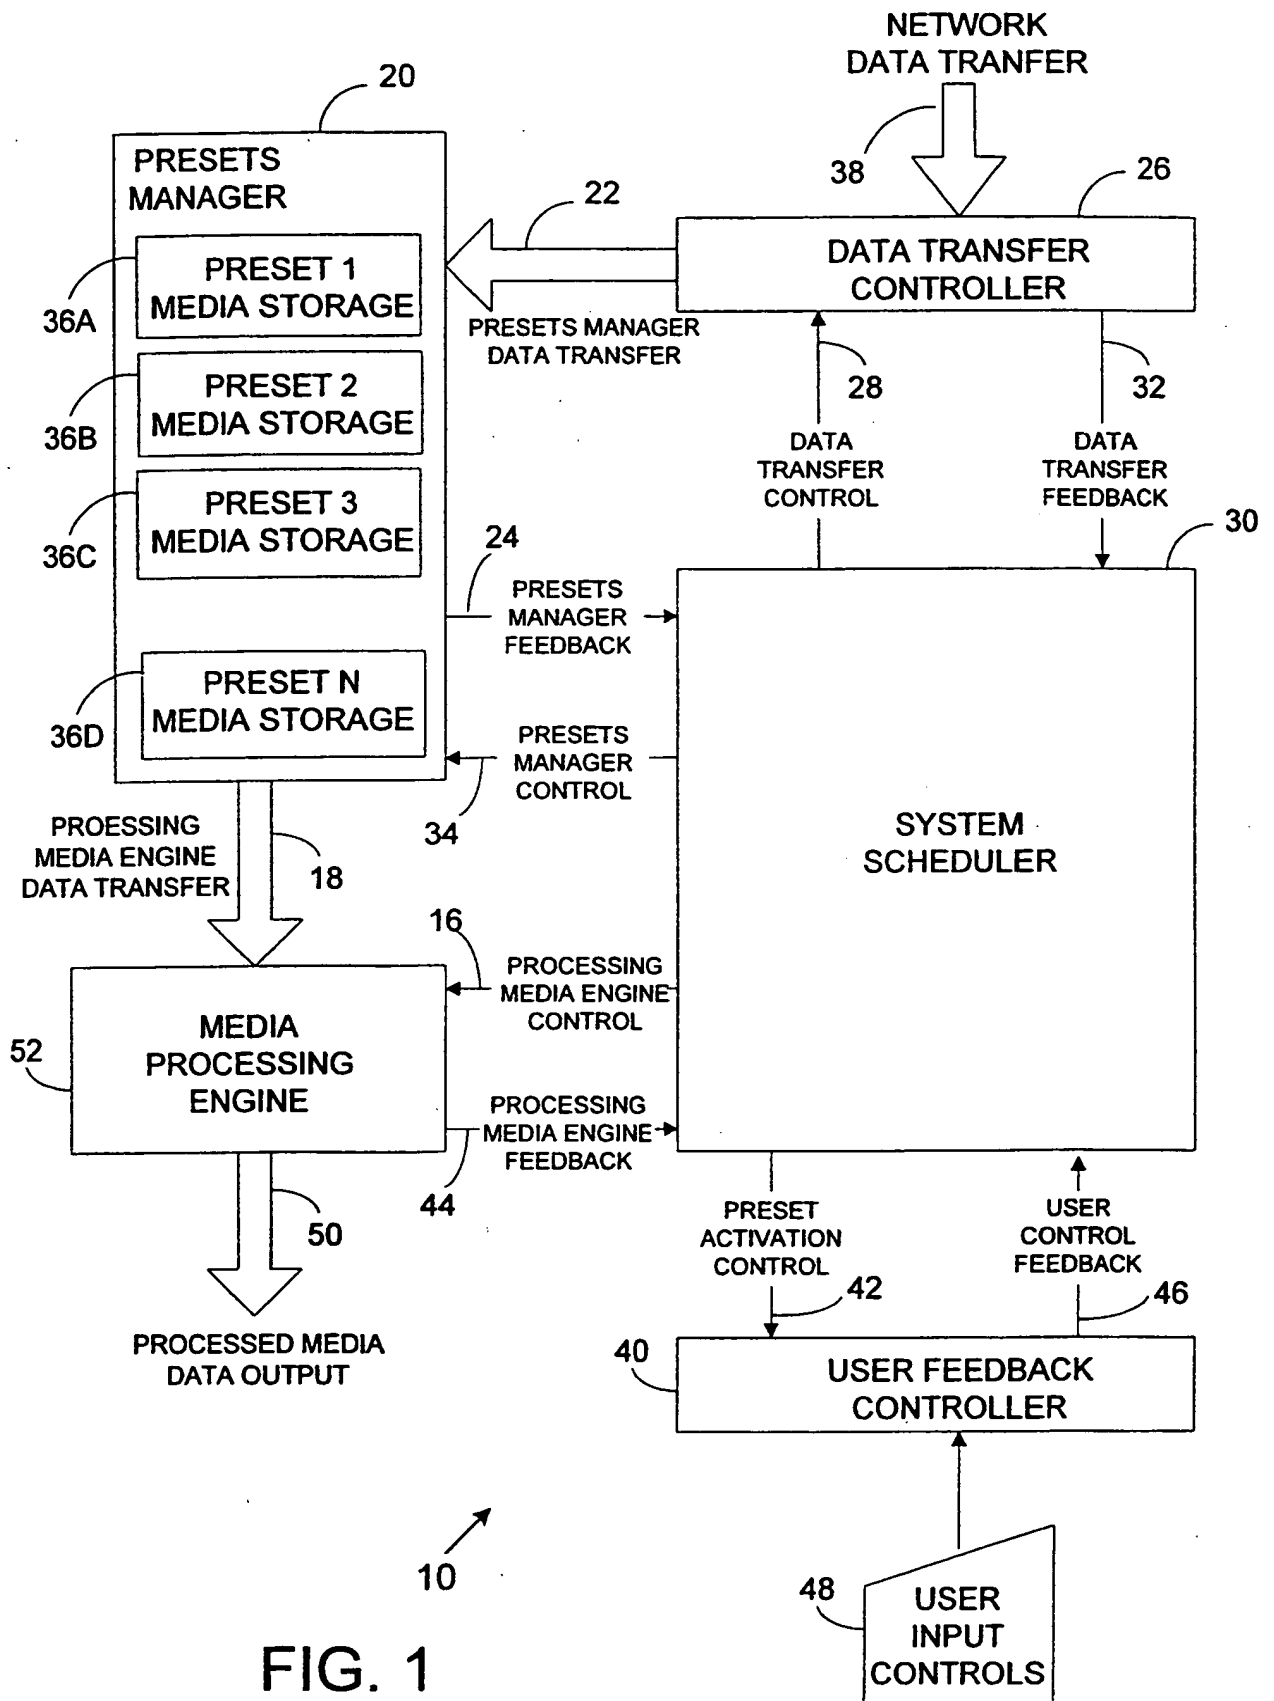

THIS PAGE BLANK (USPTO)

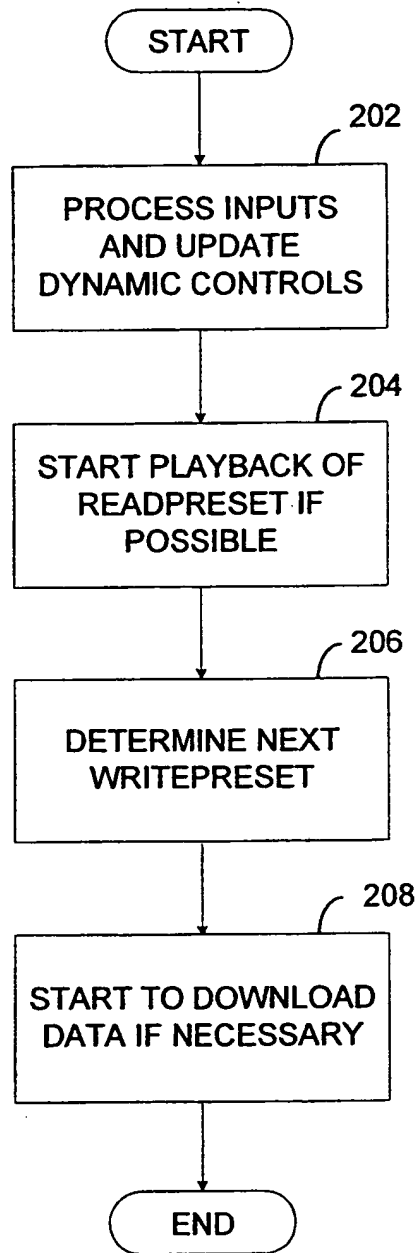


FIG. 2

THIS PAGE BLANK (USPTO)

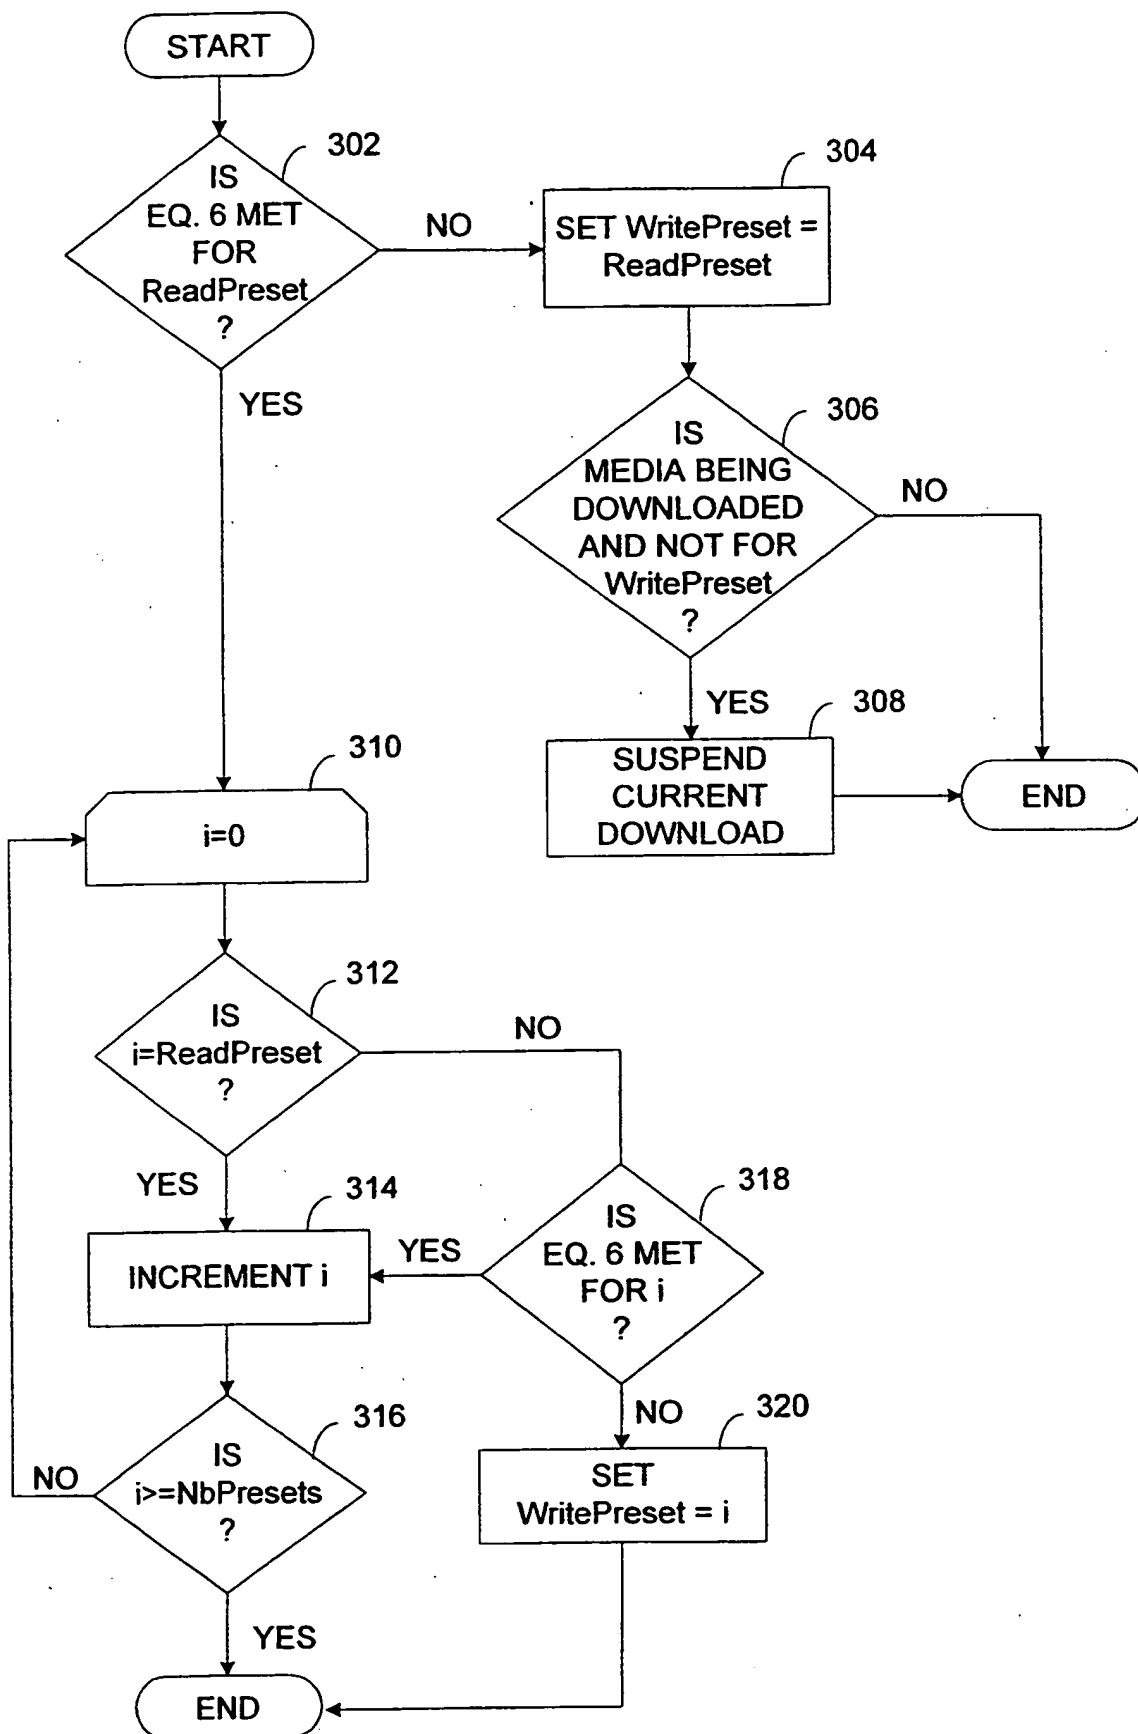


FIG. 3

THIS PAGE BLANK (USPTO)

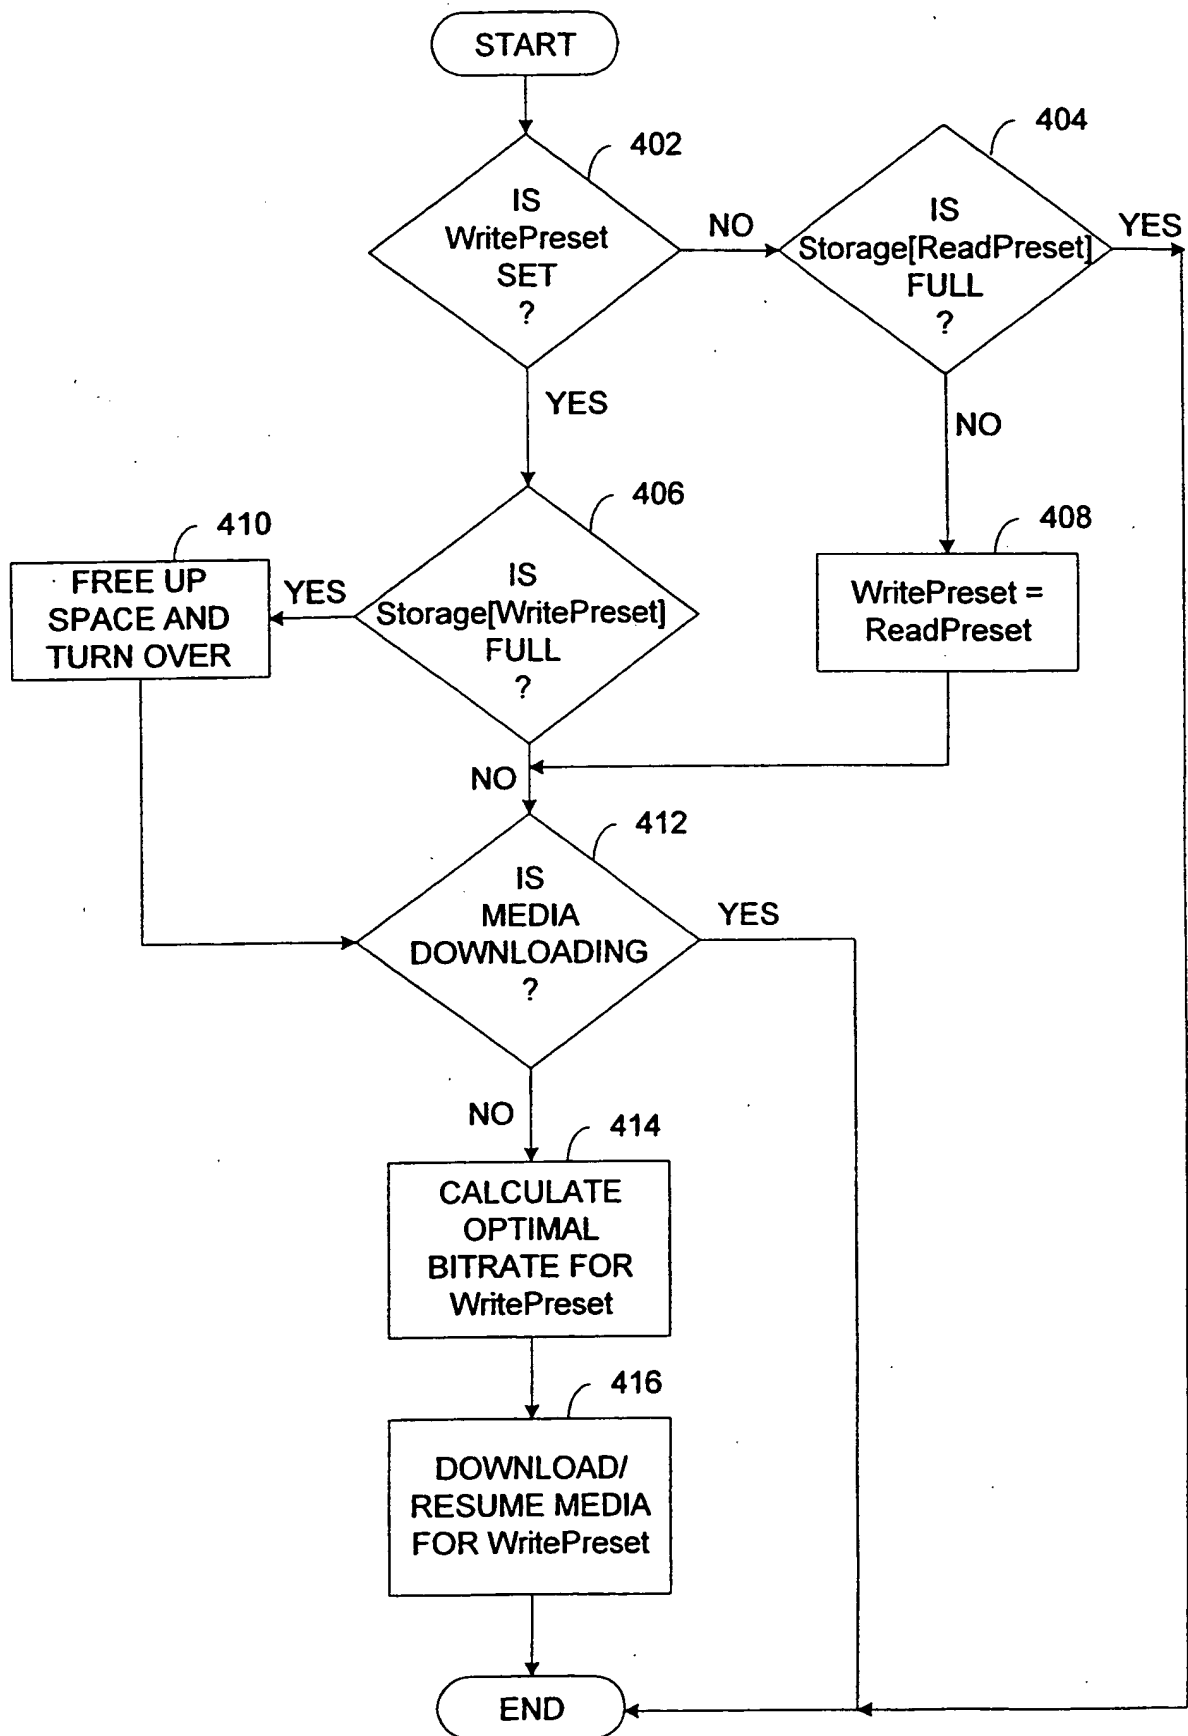


FIG. 4

THIS PAGE BLANK (USPTO)

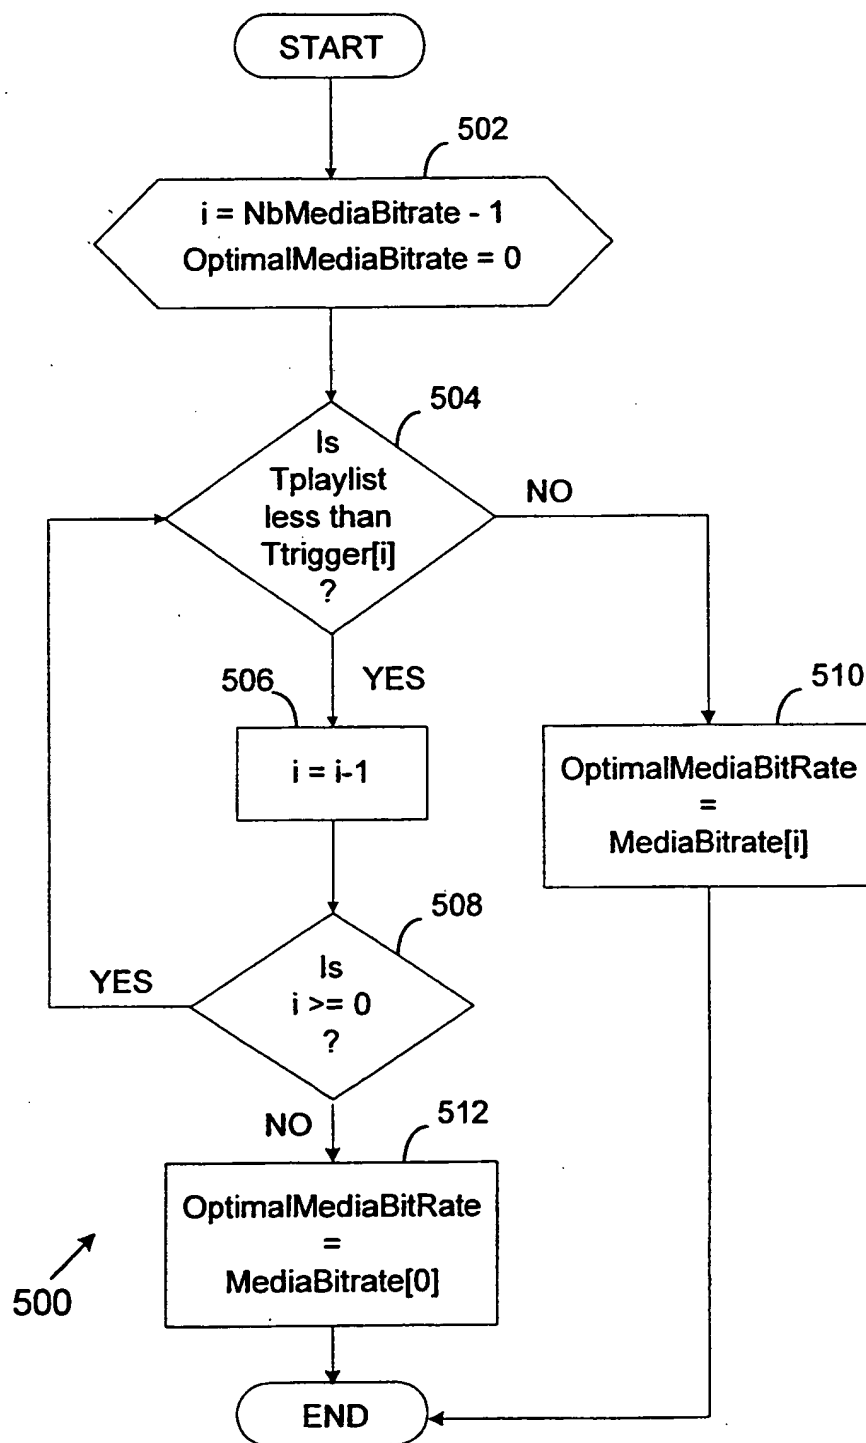


FIG. 5

THIS PAGE BLANK (USPTO)

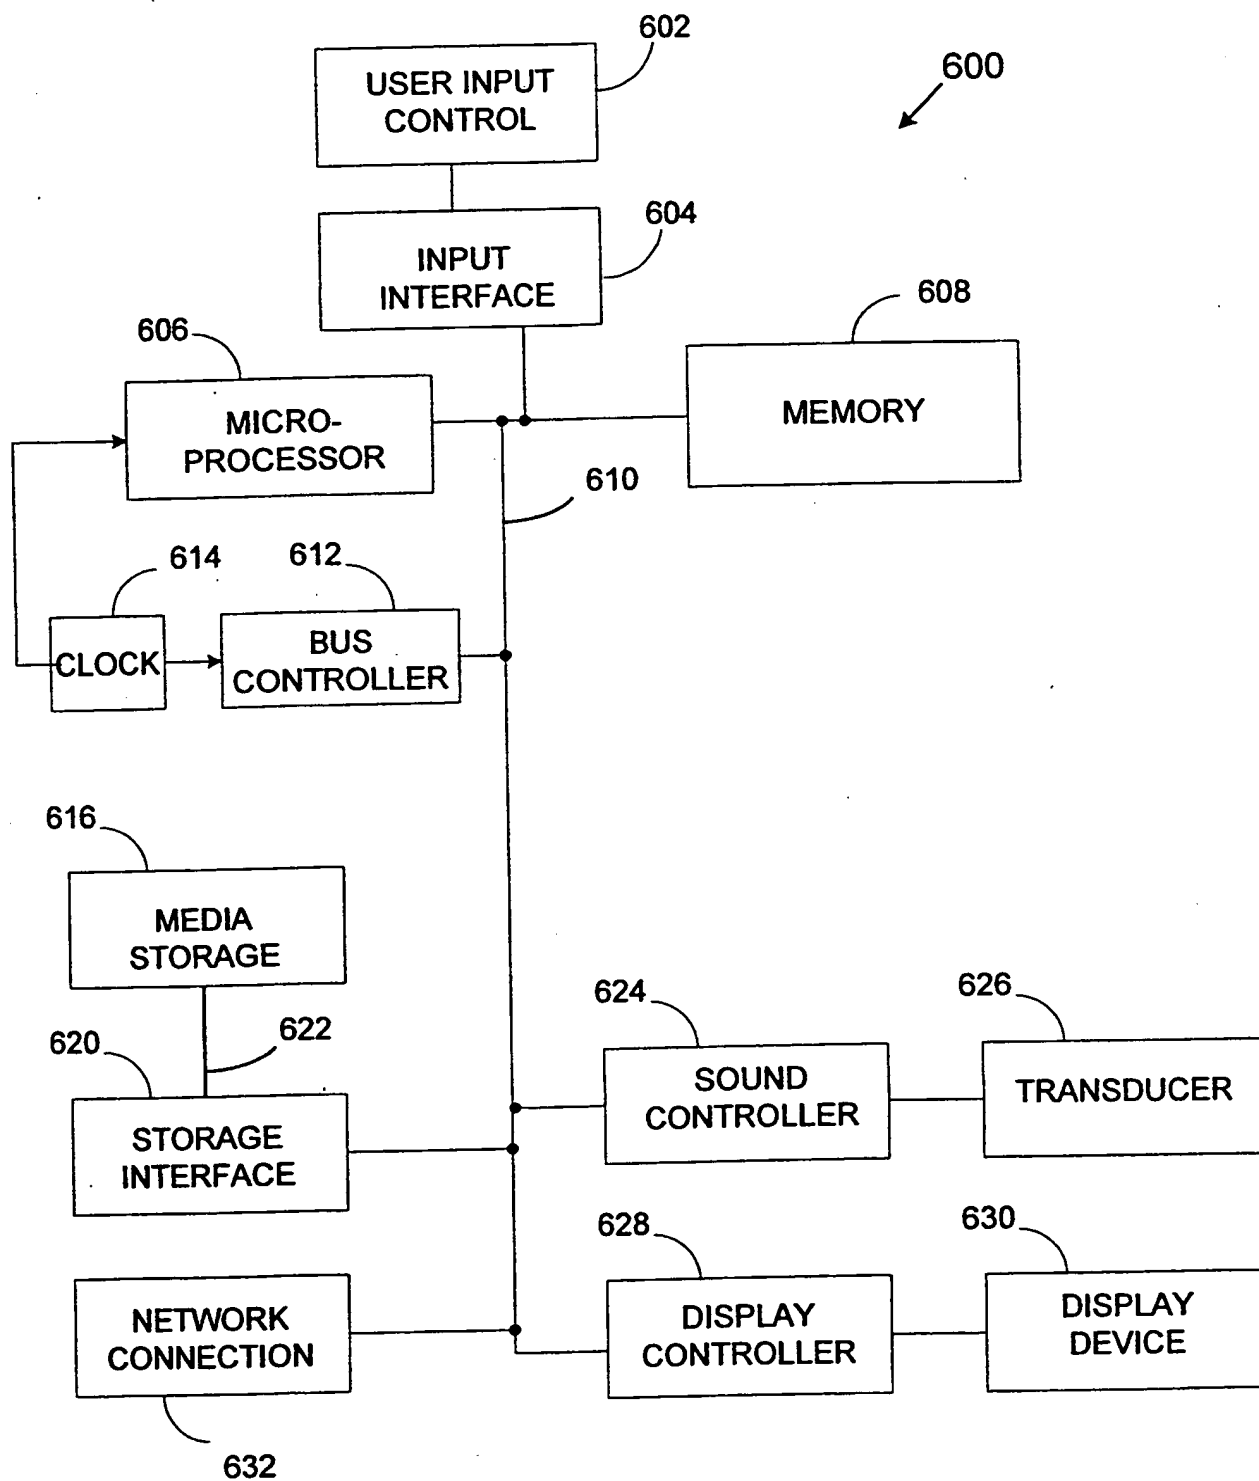


FIG. 6

THIS PAGE BLANK (USPTO)